



Starlight Silver



Mellow Lime



Sunrise Orange



Eternal Blue




Features optional or standard according to variants.

# IT'S YOUR BODY *Luxura* by Hapro

## Technical data and features

# GT

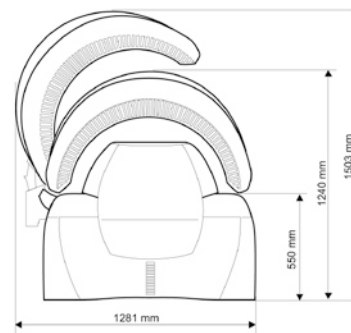

	38 SLi	38 SLi Int.	38 SLi H. Int.	40 SPr	40 SPr Int.	40 SPr H. Int.	42 SLi	42 SLi Int.	42 SLi H. Int.	42 SLi IP Control
Surface	Metallic effect	Metallic effect	Metallic effect	Metallic effect	Metallic effect	Metallic effect	Metallic effect	Metallic effect	Metallic effect	Metallic effect
Inside lighting										
Tubes top	22 x 100 W	22 x 160 W	22 x 160 W	22 x 120 W	22 x 180 W	22 x 180 W	24 x 100 W	24 x 160 W	24 x 160 W	24x IP tubes 1.80 m
Tubes base	16 x 100 W	16 x 100 W	16 x 160 W	18 x 120 W	18 x 120 W	18 x 180 W	18 x 120 W	18 x 120 W	18 x 180 W	18x IPTubes 2.00 m
Face tanner	3 x 400 W	3 x 400 W	3 x 400 W	23 x 25 W	23 x 25 W	23 x 25 W	4 x 400 W	4 x 400 W	4 x 400 W	4 x 400 W
Luxura filter technology				–	–	–				
HPS	°	°	°	–	–	–	°	°	°	°
2 m tubes in base <sup>1</sup>	–	–	–							
5 steps adjustable body cooler										
5 steps adjustable face cooler										
LED blower decor light										
Decorative panel in colour of sunbed										
Loudspeakers (2)										
SoundAround including MyMP3	°	°	°	°	°	°				
SmartVoice <sup>2</sup>	°	°	°	°	°	°	°	°	°	°
ContourPLUS										
Xsens	°	°	°	°	°	°	°	°	°	°
Qsens	°	°	°	°	°	°	°	°	°	°
CliMax <sup>3</sup>	°	°	°	°	°	°	°	°	°	°
BackFLEX				° 4	° 4	° 4	° 4	° 4	° 4	° 4
Dust filters										
EasyLift Acrylic system										
Sound volume adjustment <sup>2</sup>										
LCD timer display										
Programmable internal timer										
Connection for external timer										
Hour counter										
2nd hour counter with reset-function										
Connection	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE	400 V - 50 Hz 3~N/PE
Power (with CliMax)	ca. 6,3 (7,1) kW	ca. 7,6 (8,3) kW	ca. 9,3 (10,1) kW	ca. 5,9 (6,6) kW	ca. 7,4 (8,2) kW	ca. 8,5 (9,4) kW	ca. 7,2 (8,0) kW	ca. 9,0 (9,8) kW	ca. 10,2 (10,8) kW	ca. 9,4 (10,4) kW
Fuses	3 x 16 A	3 x 16 A	3 x 16 A	3 x 16 A	3 x 16 A	3 x 20 A	3 x 16 A	3 x 20 A	3 x 25 A	3 x 20 A
Weight (excl. packaging) (CliMax <sup>3</sup> 50 kg)	285 kg	305 kg	325 kg	295 kg	315 kg	330 kg	305 kg	325 kg	340 kg	285 kg

| = As standard, ° = Optional Specifications are subject to change without notice.

<sup>1</sup> On demand 42 SLi, 42 SLi Int., 42 SLi H. Int., 40 SPr, 40 SPr Int. and 40 SPr H. Int. are available with 1,80 m tubes and shoulder tanner.

<sup>2</sup> Only available in combination with SoundAround.

<sup>3</sup> CliMax only available in combination with ContourPLUS.

<sup>4</sup> Only available in combination with 1,80 m tubes in the base.

